
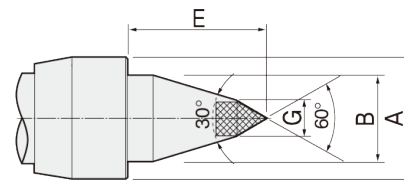


WPL30

FEATURES

- Accuracy guaranteed to 0.003mm TIR (0.0001")
- Excellent for CNC, grinder and inspection machines.
- Waterproof enhanced type.
- Heat-treated point to HRc 60 ± 2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Carbide point available.
- Carbide point to HRA 90 ± 5.

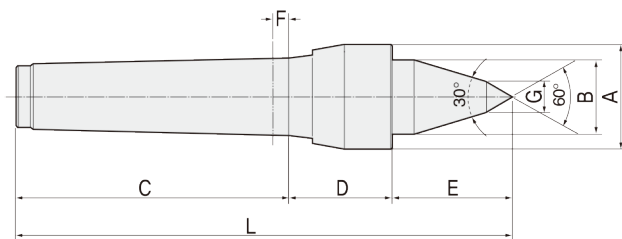

Available Carbide Tipped Points WPL30C-TYPE

- MT2: 074002
- MT3: 074003
- MT4: 074004
- MT5: 074005

Dimension

Unit: mm, kg

MODEL	MT	A	B	C	D	E	F	G	L	Workpiece Weight	Max, R.P.M	Weight	Max, Run Out
073002 (074002)	2	27.7	23.8	69	28	35	4.5	12	132	120	4,000	0.3	0.003
073003 (074003)	3	32.3	28	85	32	45	5	12	162	320	3,000	0.5	0.003
073004 (074004)	4	45	40	108	48	65	6	14	221	560	3,000	1.2	0.003
073005 (074005)	5	62	54	136	54	90	8	18	280	1,000	2,000	3.2	0.003

*(MODEL NO) : Carbide Tip Type

WPL30 type Technical data

- 2WPL30
- 3WPL30
- 4WPL30
- 5WPL30

